




Rated Load : upto 1000 Kgs
Deflection : upto 6 mm

Flexifloat is a low height captive rubber mounting especially designed where space is limited.

The axial and transverse stiffness are same but longitudinal stiffness is 2.5 time of vertical stiffness. This facilities installation where higher stiffness in one horizontal direction is desirable.

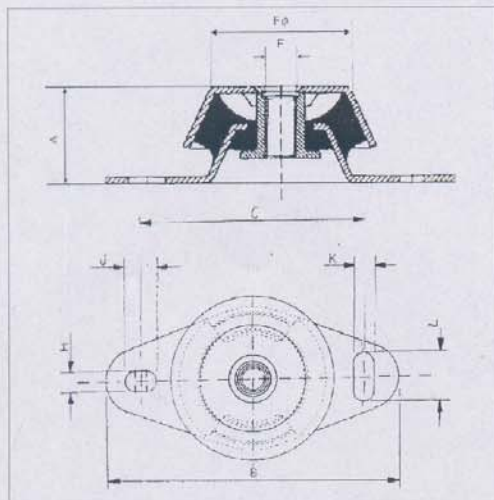

Isolator comprises of first grade bonded rubber insert with plated outer metal cover

Integral overload and rebound components limit excessive movement under the action of vehicle/ship motion or shock forces

- * Three sizes, each in three rubber stiffnesses.
- * Different vertical and lateral stiffness ratios facilitate the choice of the most appropriate isolator characteristics for a particular application.
- * Low height compact units for use where space is limited.

TYPICAL APPLICATIONS

- ◇CONTROL CABINETS
- ◇COMPRESSORS
- ◇FANS
- ◇GENERATING SETS
- ◇HYDRAULIC PUMPS
- ◇MOTORS
- ◇MARINE PROPULSION ENGINES
- ◇MOBILE UNITS

CODE	Rated load	Deflection at rated load	Nominal Dimensions in MM											
	Kgs		A	B	C	E	F	H	J	K	L			
EFM 2 45	130	6.5												
EFM 2 55	220	6.5	51	185	140	M16	70	13	20	13	30			
EFM 2 65	370	6.5												

For more detailed information and technical assistance, please contact our Applications Engineering Group.
In the interest of continual development and improvement, the company reserves the right to make modifications to these details without notice.

RESISTOFLEX PRIVATE LIMITED

Authorised Distributor



MTS Engineers Pvt. Ltd.

B-408, Wall Street - II, Opp. Orient Club, Nr. Gujarat College, Ellisbridge, Ahmedabad - 380 006.Gujarat (India). Tel. No. : 079 - 26400063, Telefax : 079 - 40047430
E-mail : info@mtsengrs.com, Web : www.mtsengrs.com